

Glazed-in louvre, heavy-duty series, pitch 50

Material

- Made from aluminium sections: AlMgSi 0.5 (according to EN 12020-2)
- Stainless steel 304 insect screen (2.3 x 2.3 mm) or mesh (6 x 6 mm) on request
- Finishing: anodized in satin/bronze colour (20 micron) or powder-coated in any RAL or Syntha Pulvin colour (40 micron)

Dimensions


- Blade pitch: 50 mm
- Frame thickness: 24 or 28 mm
- Specify on ordering: full width x height in mm
- Minimum dimensions: 220 x 220 mm

Fixing

- Suitable for 24, 28, 32 mm glazing sections. Other thicknesses on request.

Options

- Water channel
- Drainage profile
- Removable mesh
- Filter

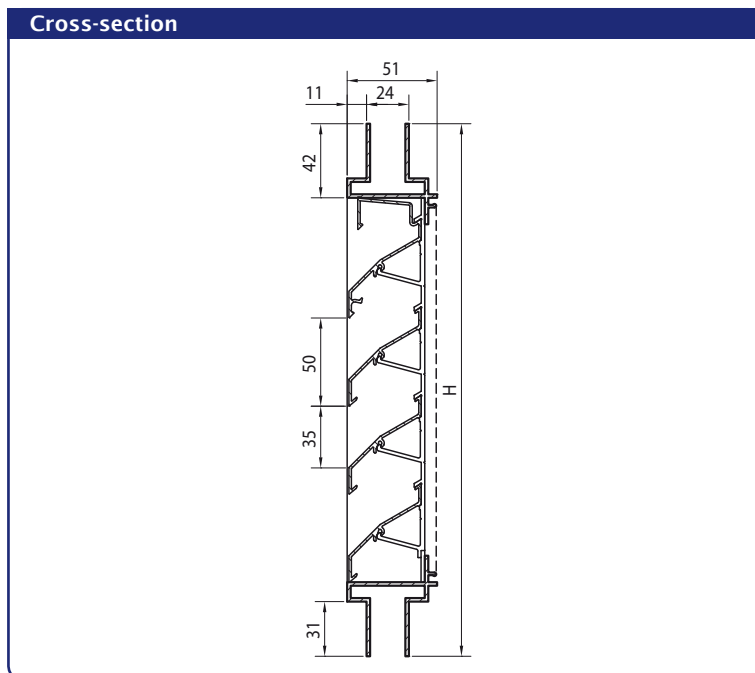

Technical specifications	
	424
Airflow	(EN 13030)
K-factor (supply)	12,57
K-factor (discharge)	8,91
C _e coefficient	0,282
C _d coefficient	0,335
Technical data	
Visual free area	70 %
Physical free area	49 %
IP class (louvre with mesh; electrical installation at least 105mm from louvre)	IP2XD