


FR 5000

SLIDE TYPE:	Full-Extension Ball Bearing Drawer Slide - Standard Version
MOUNTING:	Side Mount

WIDTH:	12.3 mm (0.48 in.)
LOAD CAPACITY:	dynamic up to 45 kg (100 lbs.)

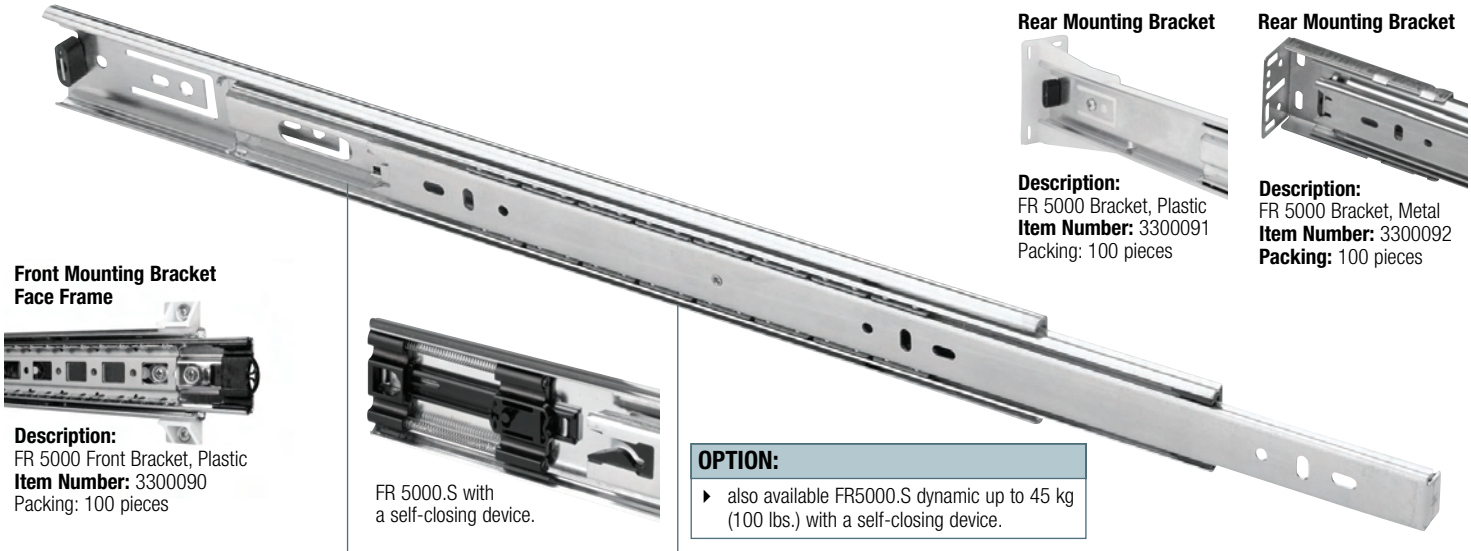

Front Mounting Bracket Face Frame



Description:
FR 5000 Front Bracket, Plastic
Item Number: 3300090
Packing: 100 pieces




FR 5000.S with
a self-closing device.

OPTION:

▶ also available FR5000.S dynamic up to 45 kg (100 lbs.) with a self-closing device.

Rear Mounting Bracket



Description:
FR 5000 Bracket, Plastic
Item Number: 3300091
Packing: 100 pieces

Rear Mounting Bracket




Description:
FR 5000 Bracket, Metal
Item Number: 3300092
Packing: 100 pieces

MATERIALS:	cold rolled steel
-------------------	-------------------

FEATURES:	steel ball bearings
------------------	---------------------

SPECIFICATIONS:	<ul style="list-style-type: none"> ▶ precision ball bearing drawer slide for medium-duty applications in office and residential furniture ▶ drawer profile features an easy to operate disconnect finger release trigger ▶ system 32 compatible hole locations ▶ drawer slide is non-handed, and has a hold-close detent
------------------------	--




12.3 mm (0.48 in.) is the actual size of the slide.
Allow a min. of 12.7 mm (0.50 in.) for clearance.



NOTE:	▶ The compatible regular extension sister model FR 5005
--------------	---

CAUTION:	Both rear mounting brackets plastic and steel only work properly if screw (see screw page) is used
-----------------	--

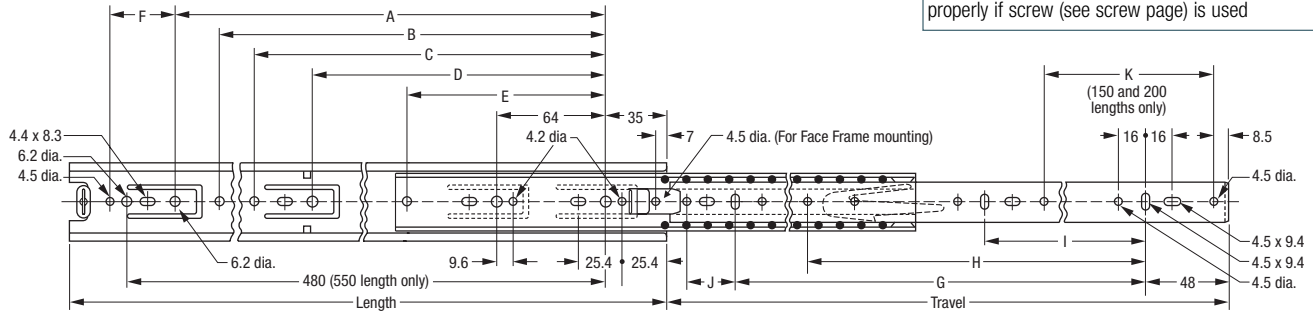

Length mm in	Travel mm in	Cabinet Profile:						Drawer Profile:					Weight kg. lbs.	Order No. white powder coat	Order No. zinc plated	Order No. black chromate									
		A mm in	B mm in	C mm in	D mm in	E mm in	F mm in	G mm in	H mm in	I mm in	J mm in	K mm in													
150	5.91 150 5.91					96	3.78						120	4.72	*	*	400014	*							
200	7.87 200 7.87					145	5.71						160	6.30	*	*	400015	*							
250	9.84 250 9.84			195	7.68	160	6.30						160	6.30	*	*	400019	400020	400099						
300	11.81 308 11.81		244	9.61	224	8.82	192	7.56	128	5.04			192	7.56			32	1.26	*	400018	400022	400100			
350	13.78 350 13.78		296	11.65	282	11.10	224	8.82	128	5.04			256	10.08			96	3.78	*	400040	400023	400101			
400	15.75 400 15.75	320	12.60	282	11.10		224	8.82	128	5.04	25	0.98	288	11.34			128	5.04	32	1.26	*	400041	400024	400102	
450	17.72 450 17.72	352	13.86	282	11.10		224	8.82	128	5.04	43	1.69	352	13.86	271	10.67	160	6.30			*	400042	400021	400104	
500	19.69 500 19.69	416	16.38	282	11.10		224	8.82	128	5.04	29	1.14	416	16.38	297	11.69	192	7.56			*	400043	400025	400105	
550	21.65 550 21.65	448	17.64	352	13.86	282	11.10	224	8.82	128	5.04	47	1.85	448	17.64	323	12.72	224	8.82			*	400044	400026	400106
600	23.62 600 23.62	480	18.90	352	13.86	282	11.10	224	8.82				512	20.16			224	8.82			*	400045	400027	400107	
650	25.59 650 25.59	544	21.42	352	13.86	282	11.10	224	8.82				544	21.42			256	10.08			*	*	400033	400108	
700	27.56 700 27.56	576	22.68	352	13.86	282	11.10	224	8.82				608	23.94			256	10.08			*	*	400034	400109	
750	29.53 750 29.53	640	25.20	352	13.86	282	11.10	224	8.82				640	25.20			256	10.08			*	*	*	*	

Packing Unit: 10 pair per box

* on request